Becatech
Interconnective Power

| | |
|---|---|
|  | **N male, (plug) straight, connector EZ 600 (EZ-600-NMH-X)** |

## Technical Specification :

Inner conductor: brass.
Outer conductor: brass.
Tube: copper.
Nut: brass.
Gasket: silicone rubber.
Insulation: PTFE.
Rated temperature: -55°C to 155°C.

## Application :

Eliminates assembly errors and soldering with crimp-style outer contacts and spring finger inner contacts.
Designed to maximize surfaces contact and minimize current density.


Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079

Becatech
Interconnective Power

**Drawing :**

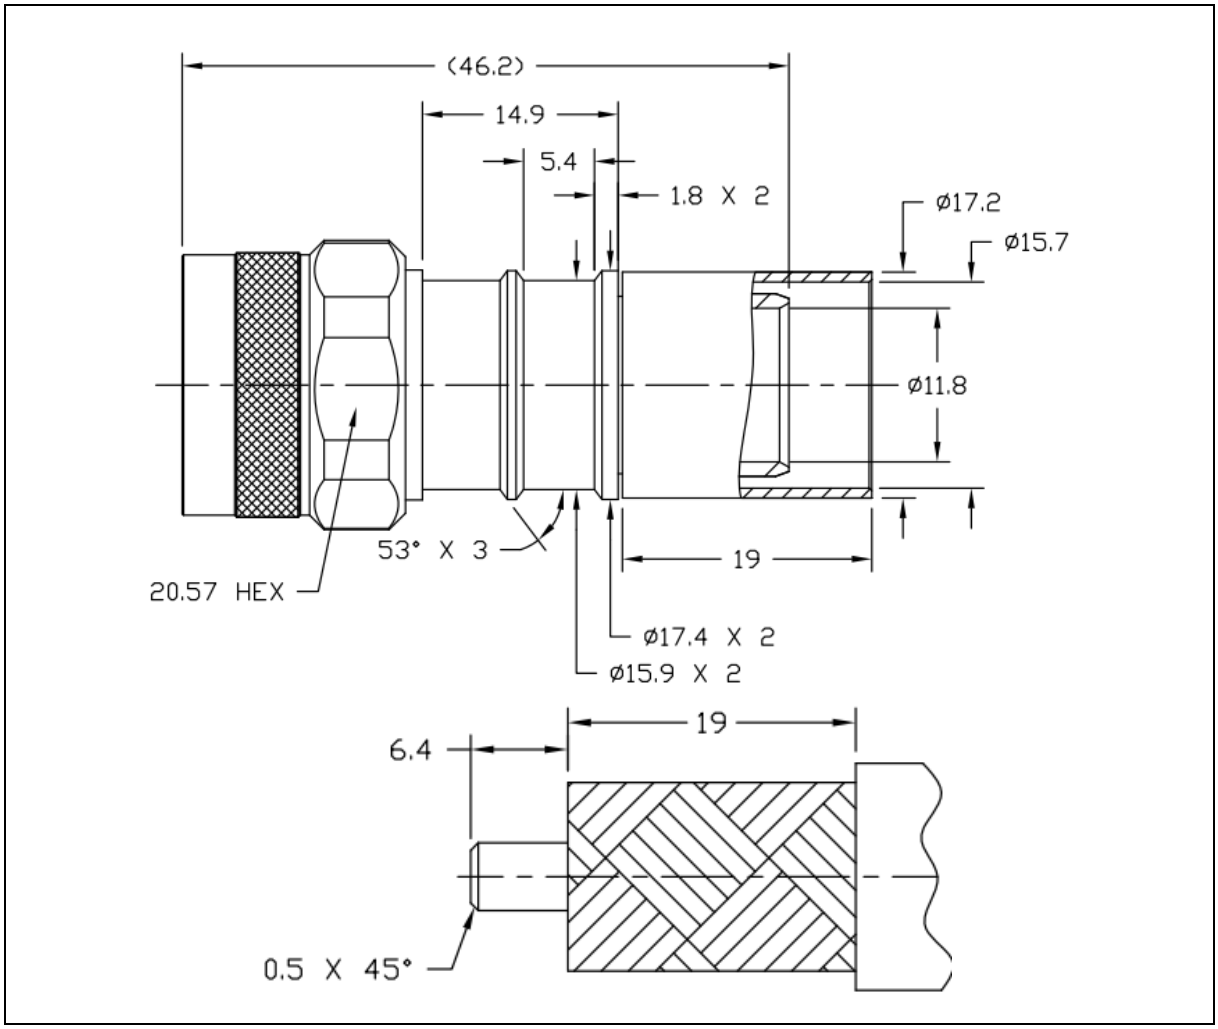


Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079