




Becatech

Interconnective Power

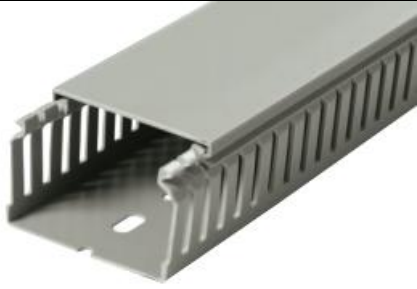


**Cable trunking with slots and base
punching
(GN-A6/4)**

Technical Specification :

Material: hard PVC quality 9051 LF.
Rated temperature: -5°C to 65°C.
Fire behaviour according to V0 UL94.
Standard length: 2 meter.

Drawing :



Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079



Becatech

Interconnective Power

Type GN-A6/4	Packaging	Height mm	Width mm	Number of wires per wire Channel (filling 50%)			Lids Packaging
				1 mm ²	1.5 mm ²	2.5 mm ²	
15x15	96	20	18	15	13	11	48
30x25	60	30	25	37	31	26	48
30x40	36	30	40	68	56	47	24
40x25	48	40	25	52	43	36	48
40x30	36	40	30	66	54	45	24
40x40	32	40	40	94	77	64	24
40x60	24	40	60	149	122	102	24
40x80	24	40	80	204	168	140	24
40x100	12	40	100	259	213	178	12
60x25	48	60	25	80	66	55	48
60x30	40	60	30	102	83	70	24
60x40	32	60	40	144	118	99	24
60x60	24	60	60	229	188	157	24
60x80	16	60	80	313	257	215	24
60x100	16	60	100	398	327	273	12
60x120	12	60	120	483	397	332	12
80x25	24	80	25	107	88	74	48
80x30	24	80	30	136	112	94	24
80x40	24	80	40	193	159	133	24
80x60	24	80	60	308	253	211	24
80x80	16	80	80	422	347	290	24
80x100	12	80	100	537	441	369	12
80x120	16	80	120	652	535	447	12
100x30	32	100	30	169	138	116	24
100x40	24	100	40	240	198	165	24
100x60	16	100	60	384	316	264	24
100x80	16	100	80	529	435	363	24
100x100	16	100	100	673	553	462	12
100x150	8	100	150	1034	849	710	12

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079