




Becatech

Interconnective Power

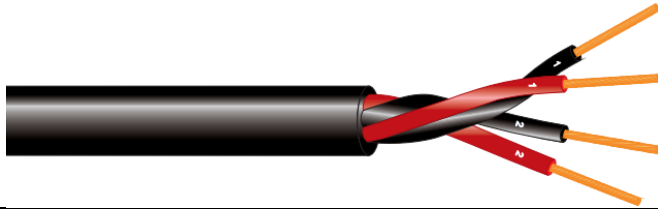

Loudspeaker cable (LiYY)

Cable Structure :

Conductor: bare copper.
Insulation: PVC YI1.
Outer sheath: PVC YM2-M64.

Application :

Connection between final amplifier and passive speaker.
The construction and materials used give the products a high resistance to mechanical stress.

Core x mm ²	Insulation Thickness mm	Overall Diameter mm
2x1.5	2.4	6.6 +/- 0.2
2x2.5	3.0	8.0 +/- 0.2
4x2.5	3.0	9.2 +/- 0.2
6x2.5	3.0	11.2 +/- 0.2
8x2.5	3.0	12.2 +/- 0.2
2x4	3.6	9.2 +/- 0.2
4x4	3.6	10.9 +/- 0.2
6x4	3.6	13.0 +/- 0.2
8x4	3.6	14.1 +/- 0.2

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079