Becatech
Interconnective Power

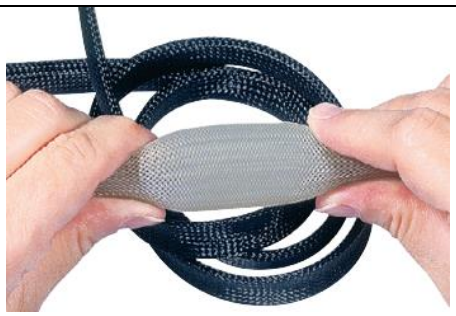

Pliosil-pet expandable braided sleeving

Technical Specification :

Material: PET.
Operating temperature: -50°C to 130°C.
Flame resistance and self-extinguishing according to V2 UL 94.

Application :

Sleeving with an expansion ratio from 1 or 2 for general use.
It has been developed for rail industry.

Type	Cover According To DIN 65164	Expansion In ø
PET 3	85	2-6
PET 4	89	3-8
PET 5	84	4-10
PET 6	81	6-12
PET 8	80	8-16
PET 10	78	10-20
PET 12	77	12-24
PET 15	76	15-27
PET 20	70	19-32
PET 25	74	24-38
PET 30	77	28-47
PET 40	74	40-63
PET 50	79	45-75
PET 60	83	48-92

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079