




Becatech

Interconnective Power

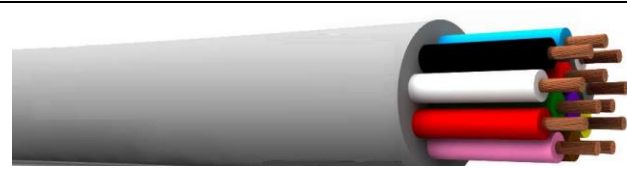

**Signal cable
(PVC HT)**

Cable Structure :

Conductor: flexible electrolytic bare copper.
Insulation: 105°C PVC.
Outer sheath: 105°C PVC.

Technical Specification :

Nominal voltage: 300V.
Rated temperature: -20°C to 105°C.
Rated bending radius: 6 x ϕ .
Flame resistant according to IEC 60332-1-2.

Application :

Suitable for indoor use and fixed installation.
Is intended for control and data transmission.

Size Conductor mm ²	Overall Diameter mm	Thickness Sheath mm
2x0.25	3.8 +/- 0.2	0.60
2x0.34	4.8 +/- 0.2	0.80
2x0.34	4.8 +/- 0.2	0.80

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079