
Becatech
Interconnective Power

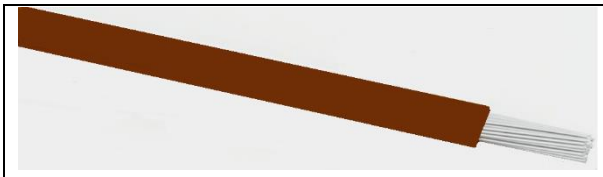

Single core wire UL/CSA 1007/1569

Cable Structure :

Conductor: tin plated according to EN 13602.
Insulation: UL-PVC 105°C.

Technical Specification :

Rated temperature static: -40°C to 105°C.
Rated temperature moved: -5°C to 105°C.
Flame retardant according to UL 1581 VW-1/UL 2556 FV-2 and according to IEC 60332-1-2.
Rated bending radius:

- Static installation: 10 x ø.
- Moved installation: 15 x ø.

Application :

Suitable for wiring in fixed installations of electric and electronic components in switch gear cabinets, as well as outside switchgear cabinets if installed in a protected wat.

Core x mm²	Overall Diameter mm	Cu Index	Weight (kg/km)
1x0.5	2.1	4.8	8.5
1x0.75	2.4	7.2	11.0
1x1	2.5	9.6	13.7

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079