




# Becatech

Interconnective Power

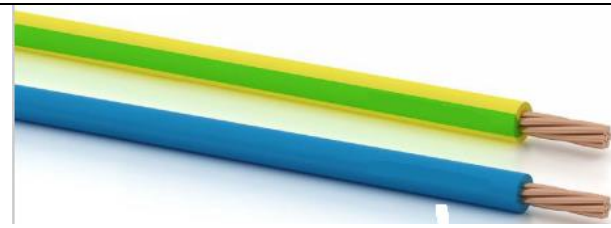

## PVC installation power cable (VOB)

### Cable Structure :

Conductor: stranded copper (class 2).  
Insulation: PVC.

### Technical Specification :

Rated temperature laying: -5°C to 50°C.  
Rated temperature operating: -25°C to 70°C.  
Rated bending radius: 6 x  $\phi$ .  
Fire behaviour according to IEC 60332-1-2.

### Application :


Domestic and industrial installations with appropriate protection.

Core x mm <sup>2</sup>	Insulation Thickness mm	Overall Diameter mm	Cable Weight (kg/km)
1x1.5	0.7	3.0	25
1x2.5	0.8	3.6	35
1x4	0.8	4.2	50
1x6	0.8	4.7	70
1x10	1.0	6.0	115
1x16	1.0	7.0	165
1x25	1.2	8.5	260
1x35	1.2	10.0	345
1x50	1.4	11.5	485
1x70	1.4	13.0	680

Becatech B.V.  
Middenweg 18  
3930 Hamont-Achel

info@becatech.be  
www.becatech.be  
+32 (0)11 19 29 45

IBAN BE89363217265185  
VAT BE0777.903.079  
CoC 0777.903.079



# Becatech

## Interconnective Power

1x95	1.6	15.0	940
1x120	1.6	16.5	1170
1x150	1.8	18.5	1440
1x185	2.0	21.0	1810
1x240	2.2	24.0	2325
1x300	2.4	26.0	2895
1x400	2.6	29.0	3750

Becatech B.V.  
Middenweg 18  
3930 Hamont-Achel

info@becatech.be  
www.becatech.be  
+32 (0)11 19 29 45

IBAN BE89363217265185  
VAT BE0777.903.079  
CoC 0777.903.079